



输入属于NPN型，不需要外接电源，直接短接COM和X点即可



模拟量输入

+	-	+	-	+	-	+	-	+	-
AD0	AD1	AD2	AD3	AD4					


0-10V模拟量输入

+	-	+	-	+	-	+	-	+	-
AD5	AD6	AD7	AD8	AD9					

方向 脉冲

Y4	-	+	Y0	-	+
Y5	-	+	Y1	-	+
Y6	-	+	Y2	-	+
Y7	-	+	Y3	-	+
NC			NC		
NC			NC		
NC			NC		
NC			NC		

CAN	
L	H
B	A
GND	



PLC下载口

- 2 TX
- 3 RX
- 5 GND

JT2N-40MRT-10AD-2DA

PLC运行开关








模拟量输出

DA1	DA0
I-V-G	I-V-G

称重-2
E- E+ S- S+

称重-1
E- E+ S- S+

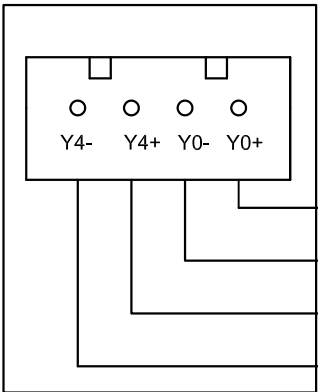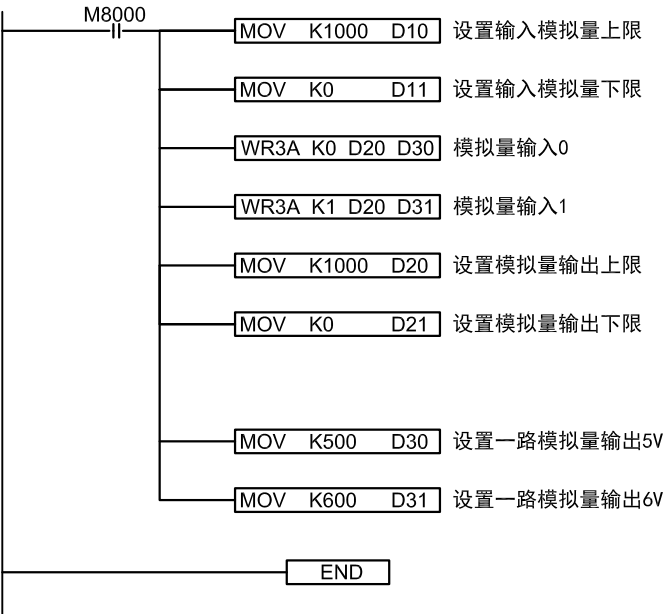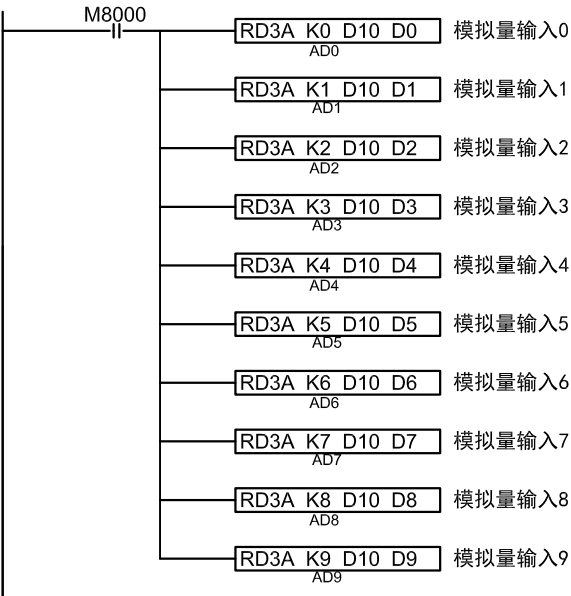

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--