



输入属于NPN型，不需要外接电源，直接短接COM和X点即可



03	01	05	06
02	02	04	05
GND	X0	X3	X5
0V			
24V			

CAN	485-2	485-1
L	B	A
H	B	A
GND		



PLC下载口
2 TX
3 RX
5 GND





JT3U-12MRT-2AD-1DA

方向			脉冲		
Y4	-	+	Y0	-	+
Y5	-	+	Y1	-	+
Y6	-	+	Y2	-	+
Y7	-	+	Y3	-	+



0-10V模拟量输出
DA0 AD0 AD1
0-10V模拟量输入

01	02	03	04	05	06	07	08	09	10
COM0	Y20	COM1	Y21	COM2	Y22	Y23	COM3	Y24	Y25

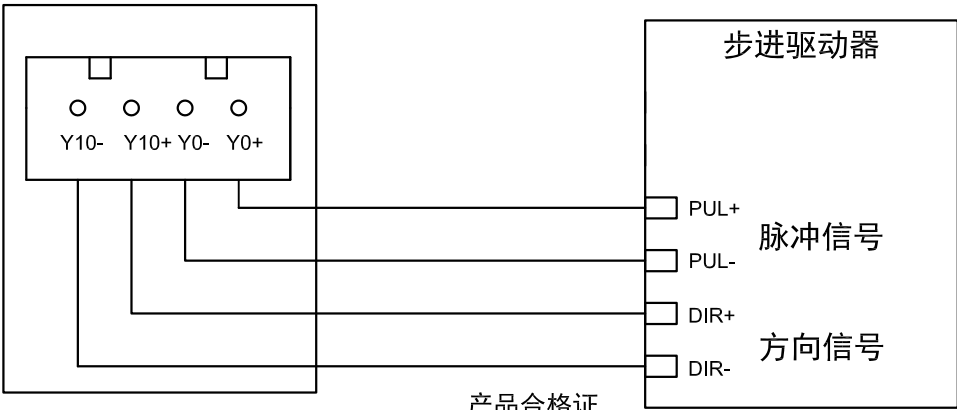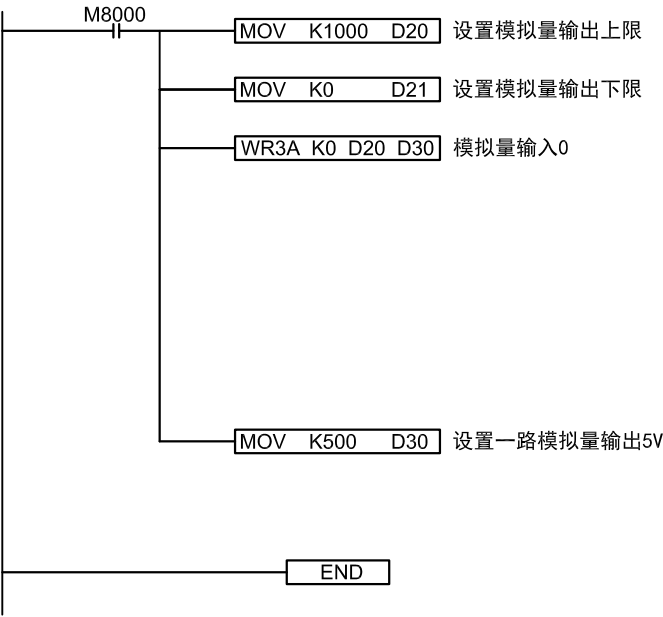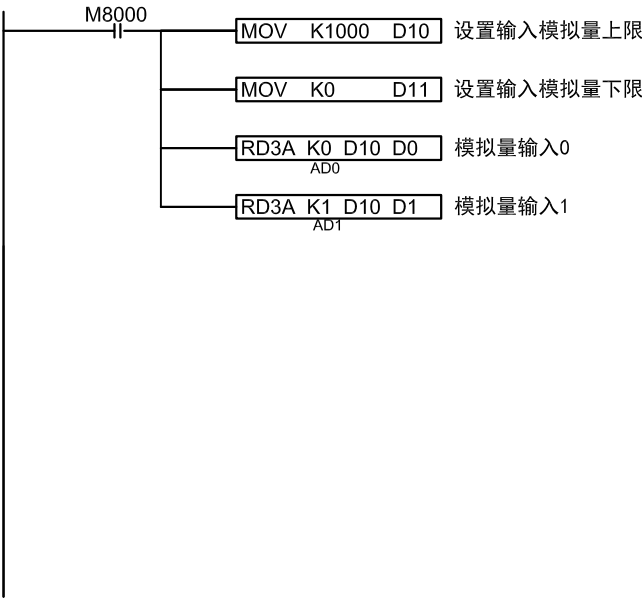

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--