

输入属于NPN型，不需要外接电源，直接短接COM和X点即可



01	02	03
24V	0V	GND

01	02	03	04	05
COM	X0	X1	X2	X3


06	07	08	09	07
COM	X4	X5	X6	X7

G-V-I	G-V-I
DA0	DA1

0-10V模拟量输出

方向			脉冲		
Y10	-	+	Y0	-	+
Y11	-	+	Y1	-	+
Y12	-	+	Y2	-	+
Y13	-	+	Y3	-	+
Y14	-	+	Y4	-	+
Y15	-	+	Y5	-	+

CAN	485-2	485-1
L	H	
B	A	
B	A	
GND		



PLC下载口

- 2 TX
- 3 RX
- 5 GND

JT3U-16MRT-6AD-2DA

PLC运行开关








+	-	+	-	+	-
AD0	AD1	AD2			

0-10V模拟量输入

+	-	+	-	+	-
AD3	AD4	AD5			

01	02	03	04	05	06	07
COM0	Y20	Y21	COM1	Y22	Y23	COM2

08	09	10	01	02	03	04
Y24	Y25	COM3	Y26	Y27	NC	NC

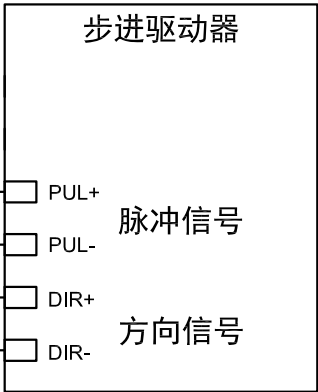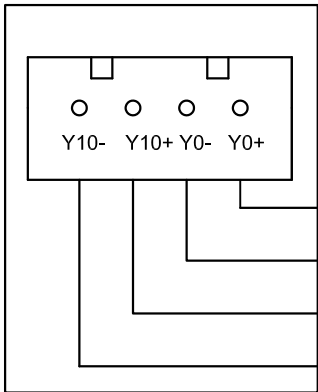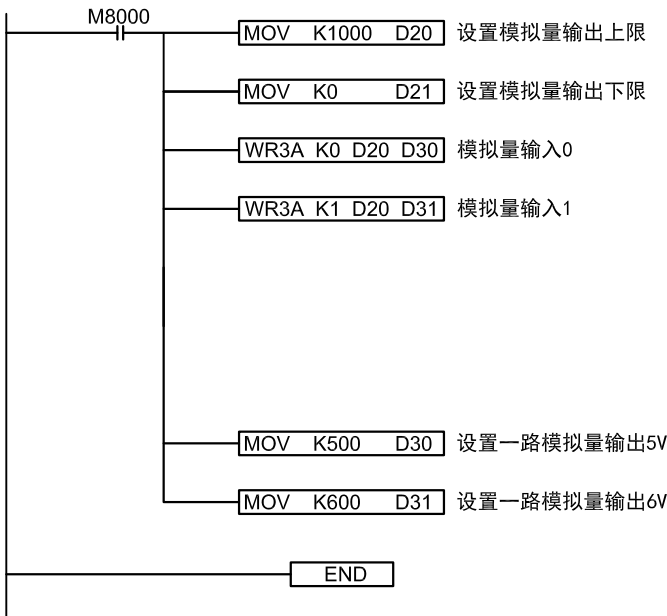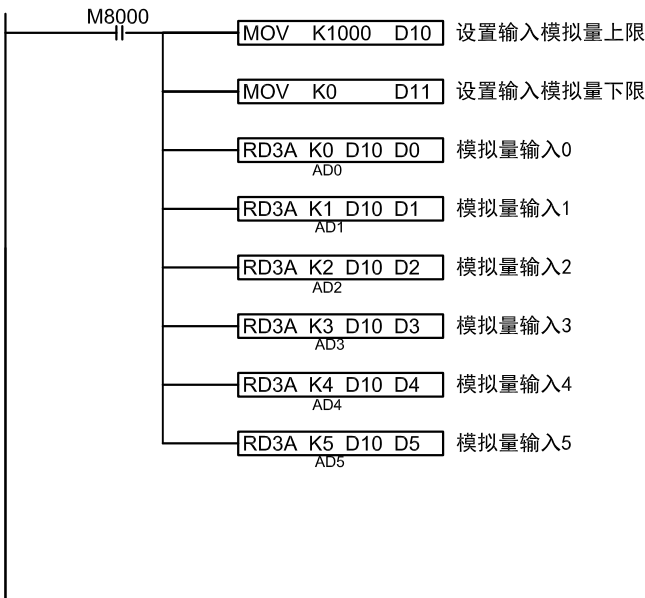

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--