


输入属于NPN型，不需要外接电源，直接短接COM和X点即可



01	02	03	04	05	06	07	08	09	10	11	12
24V	GND	0V	COM	X0	X1	X2	X3	X4	X5	X6	X7

模拟量输入


温度输入

+	-	+	-	+	-	+	-	+	-
AD0	AD1	AD2	TK0	TK1					

0-10V模拟量输入

NTC 10K温度探头

CAN	485-2	485-1
L	H	B
A	B	A
A		
GND		



PLC下载口

2 TX

3 RX

5 GND

JT3U-23MTT-16MT-2TK-3AD-2DA

方向 脉冲

Y10	-	+	Y0	-	+
Y11	-	+	Y1	-	+
Y12	-	+	Y2	-	+
Y13	-	+	Y3	-	+
Y14	-	+	Y4	-	+
Y15	-	+	Y5	-	+
Y16	-	+	Y6	-	+
Y17	-	+	Y7	-	+

PLC运行开关





模拟量输出

DA1	DA0
I-V-G	I-V-G

01	02	03	04	05	06	07	08	09	10
COM0	Y20	Y21	Y22	Y23	COM1	Y24	Y25	Y26	Y27

称重-2
E- E+ S- S+

称重-1
E- E+ S- S+

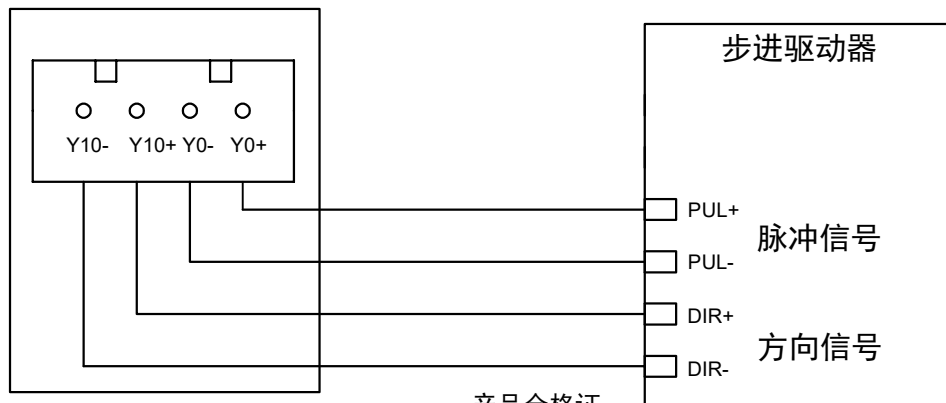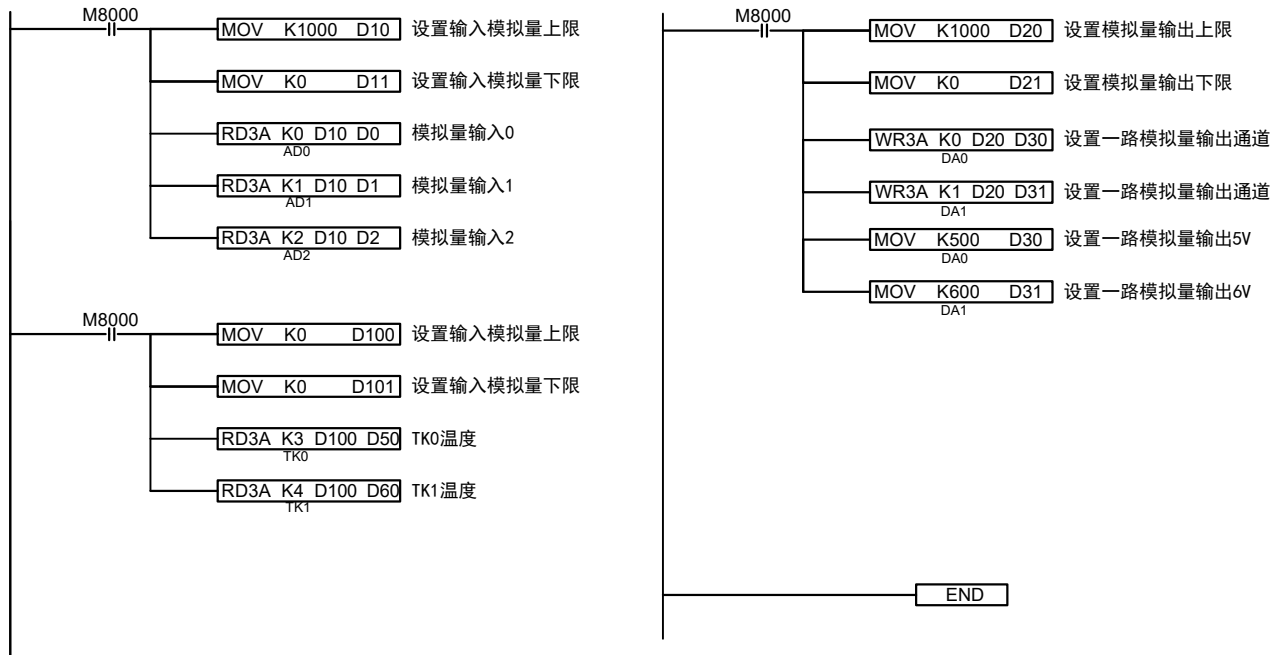

产品合格证

生产日期		检验结论	合格	检验员	
------	--	------	----	-----	--