



输入属于NPN型，不需要外接电源，直接短接COM和X点即可



模拟量输入

+	-	+	-	+	-
AD0	AD1	AD2			


0-10V模拟量输入

+	-	+	-	+	-	+	-	+	-
AD3	AD4	AD5	AD6	AD7					

方向 脉冲

Y10	-	+	Y0	-	+
Y11	-	+	Y1	-	+
Y12	-	+	Y2	-	+
Y13	-	+	Y3	-	+
Y14	-	+	Y4	-	+
Y15	-	+	Y5	-	+

CAN	485-2	485-1
L	H	
B	A	
B	A	
GND		



PLC下载口

- 2 TX
- 3 RX
- 5 GND

JT3U-26MRT-8AD-2DA

PLC运行开关








模拟量输出

DA1	DA0
I-V-G	I-V-G

称重-2
E- E+ S- S+

称重-1
E- E+ S- S+

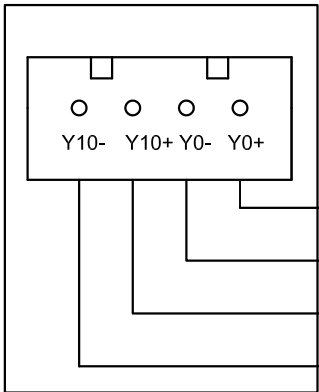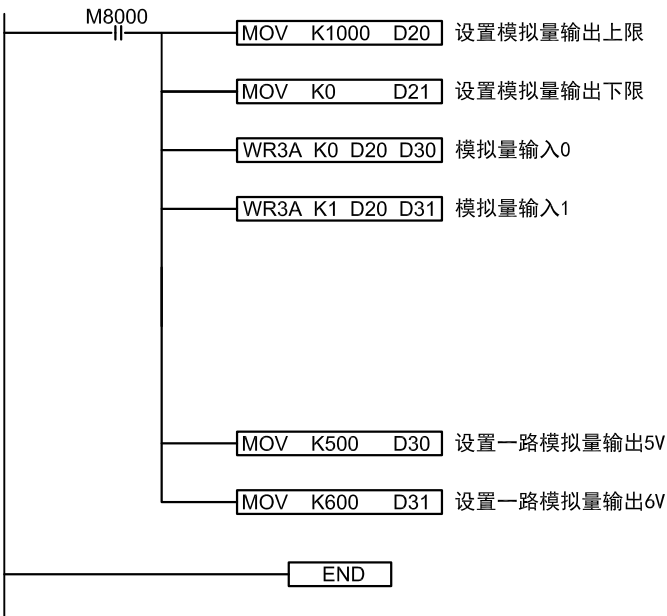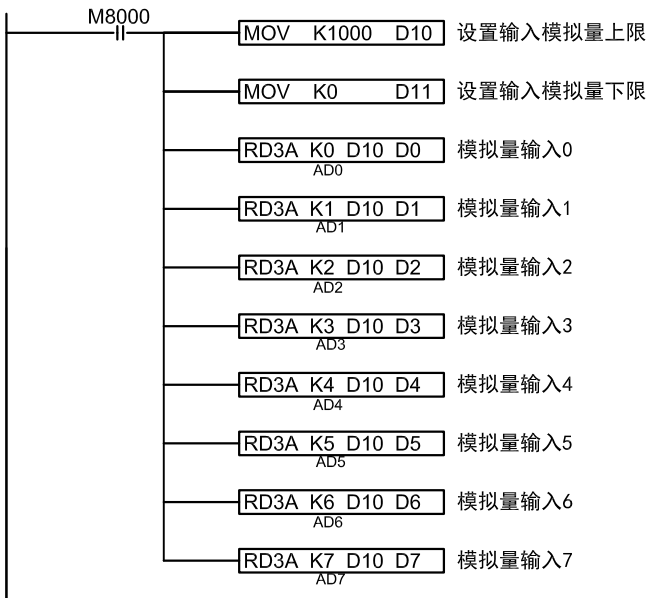

步进驱动器

脉冲信号

方向信号

产品合格证

生产日期

检验结论

合格

检验员