


输入属于NPN型，不需要外接电源，直接短接COM和X点即可



01	02	03
24V	0V	GND

01	02	03	04	05	06	07
COM	X0	X1	X2	X3	X4	X5

08	09	10	11	12	13	14
X6	X7	X10	X11	X12	X13	X14

15	16	17	18	19	20	21
X15	X16	X17	X20	X21	X22	X23

模拟量输入

+	-	+	-	+	-	+	-	+	-
AD0	AD1	AD2	AD3	AD4					


0-10V模拟量输入

+	-	+	-	+	-	+	-	+	-
AD5	AD6	AD7	AD8	AD9					

方向 脉冲

Y10	-	+	Y0	-	+
Y11	-	+	Y1	-	+
Y12	-	+	Y2	-	+
Y13	-	+	Y3	-	+
Y14	-	+	Y4	-	+
Y15	-	+	Y5	-	+

CAN	485-2/485-1
L	H
B	A
B	A
GND	



PLC下载口

- 2 TX
- 3 RX
- 5 GND

JT3U-40MRT-10AD-2DA

PLC运行开关



模拟量输出

DA1	DA0
I-V-G	I-V-G





称重-2
E- E+ S- S+

称重-1
E- E+ S- S+

01	02	03	04	05	06	07	08	09
COM0	Y20	Y21	Y22	Y23	COM1	Y24	Y25	Y26

10	01	02	03	04	05	06	07	08
COM2	Y27	Y30	Y31	Y32	COM3	Y33	Y34	Y35

09	10	01	02	03	04	05	06	06
COM4	Y36	Y37	Y40	COM5	Y41	Y42	Y43	NC

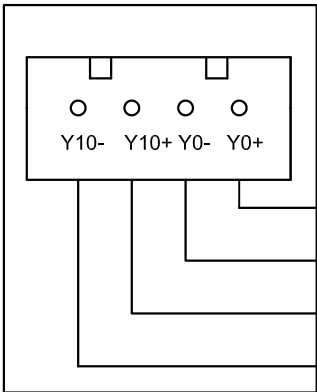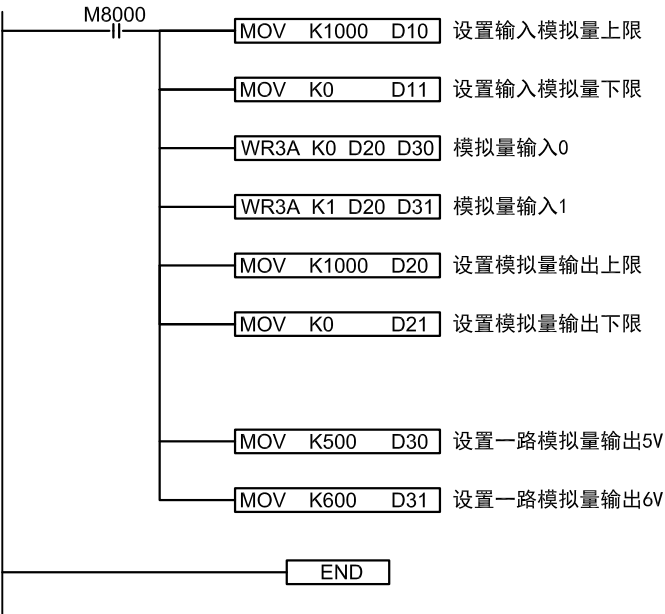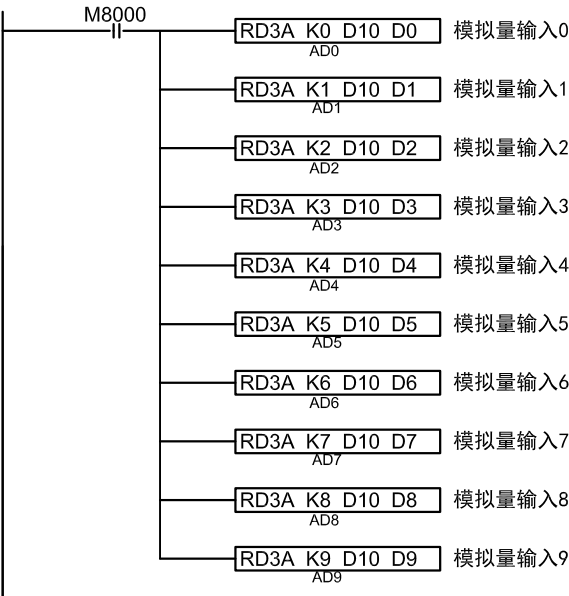

步进驱动器

脉冲信号

方向信号

产品合格证

生产日期

检验结论

合格

检验员